











1 Li Kontrol Sistemi

DH-TPC-BF5421P-TB13F8-HTM		<p>Detector resolution: 256 * 192 Spectral range: 8µm ~ 14µm Thermal imaging lens: 7mm Sensitivity: <50 mK Visible light: 1 / 2.8 "CMOS Visible light lens: 8mm Sound and light alert: built-in white light warning light, horn Temperature measurement range: 30 °C ~ 45 °C, Resolution: 1080P Temperature measurement accuracy: ± 0.3 °C, with black body; ± 1 °C, without black body</p>
JQ-D70Z		<p>Working temperature: 40.0 °C (ring temperature + 5.0 °C ~ 50.0 °C adjustable) Temperature resolution: 0.1 °C Temperature measurement accuracy: ± 0.2 °C (single point) Temperature stability: ± (0.1 ~ 0.2) °C / 30min Effective emissivity: 0.97 ± 0.02 Power: 220VAC 50Hz Ambient temperature and humidity: 0 ~ 40 °C / ≤80% RH</p>
DH-PFM320D-EN		Desktop power adapter-AC200V ~ 240V-12V2A
IVSS7008-1I		<ol style="list-style-type: none"> 1. Alarm event access 2. Alarm recording storage, query, playback 3. Face recognition 4. Local display
DHI-DSSPro-Base-License		DSS PRO
VCT-999		Tripod
DHL32-F600		32" FHD LCD Monitor
4 TB SEAGATE HDD		4 TB HDD
RAW021-00		RAW021-00 - APARAT



RESMİ TÜRKİYE DİSTRİBÜTÖRÜ

Termal Vücut Sıcaklığı Ölçümü

Temassız Yapay Zeka Ürünler

Corona virüsü için bir önlem*



36.6°C

35.5°C

37.3°C


36.6°C

Dahua, son derece hassas vücut sıcaklığı ölçümüne ($\pm 0,3$ derece hassasiyet) sahip en yeni termal kamerayı piyasaya sürdü. Hızlı ve temassız erişim sağlayan ve 3mt mesafeye kadar çoklu kişi ölçümünü dahili Yapay Zeka algoritması ile gerçekleştirmektedir.

*Corona'nın (NCoV) ilk belirtileri arasında yer alan yüksek ateşi tespit ederek önlem alınmasına yardımcı olur



I Çözüm

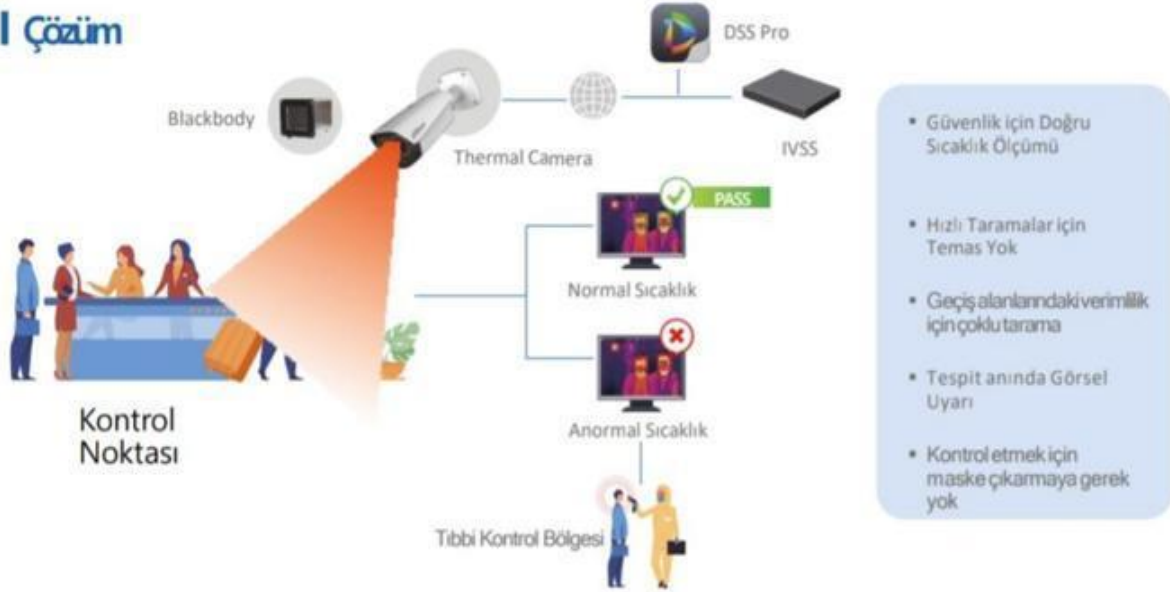

I Uygulama Alanları



Havalimanlar



Metrolar



İş Merkezleri



Kampüsler

I Önerilen Ürünler



TPC-BF3221-T + JQ-D70Z

Termal: 256x192,7 mm
Visible: 2 MP, 8 mm
Beyaz Işık ve Sesli İkaz
Sıcaklık Doğruluğu $\pm 0.3^{\circ}\text{C}$
(black box ile)



IVSS7008-1I

Termal kameradaki algılanan alarmların kaydı, istatistiksel raporlama
8 kanal maske algılama
8 kanal yüz tanıma



DSS Pro

Kameraları Yönetimi
Gerçek zamanlı Sıcaklık Gösterimi
Zengin Alarm Bilgilendirmesi
Çoklu Operatör Desteği

* Design and specifications are subject to change without notice.

Ver: 1. Mar. 2020

DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053
Tel: +86-571-87688883 Fax: +86-571-87688815
Email: ceen_marketing@dahuatech.com
www.dahuasecurity.com/ceen

